



# S275 TRACK-MOUNTED SCREENER


The McCloskey S275 left nothing out when it came to features or size to get the highest productivity finishing product screening job done. From the high-capacity feeder with tipping grid and adjustable spreader plate at the tip of the feed conveyor, to the high-energy inclined dual screenboxes and four finished product conveyors, produce those piles as high as possible.

## FEATURES

- ✓ Double 12x6 heavy duty high energy 2 bearing 3 deck screenboxes
- ✓ 225Hp CAT engine Tier 3 or 4F Stage V, 218Hp Volvo Tier 4 engine or Stage V
- ✓ Track mobile
- ✓ Integrated hydraulic folding stockpiling conveyors
- ✓ Remote control tipping grid
- ✓ Fast on-site setup time – 15 minutes typically



The benefits of dual screenboxes are endless. You are in control of each box separately, allowing you to dial in the stroke, speed and direction for each box independently. Also, the overall machine weight is lighter with two boxes, as compared to one large box.

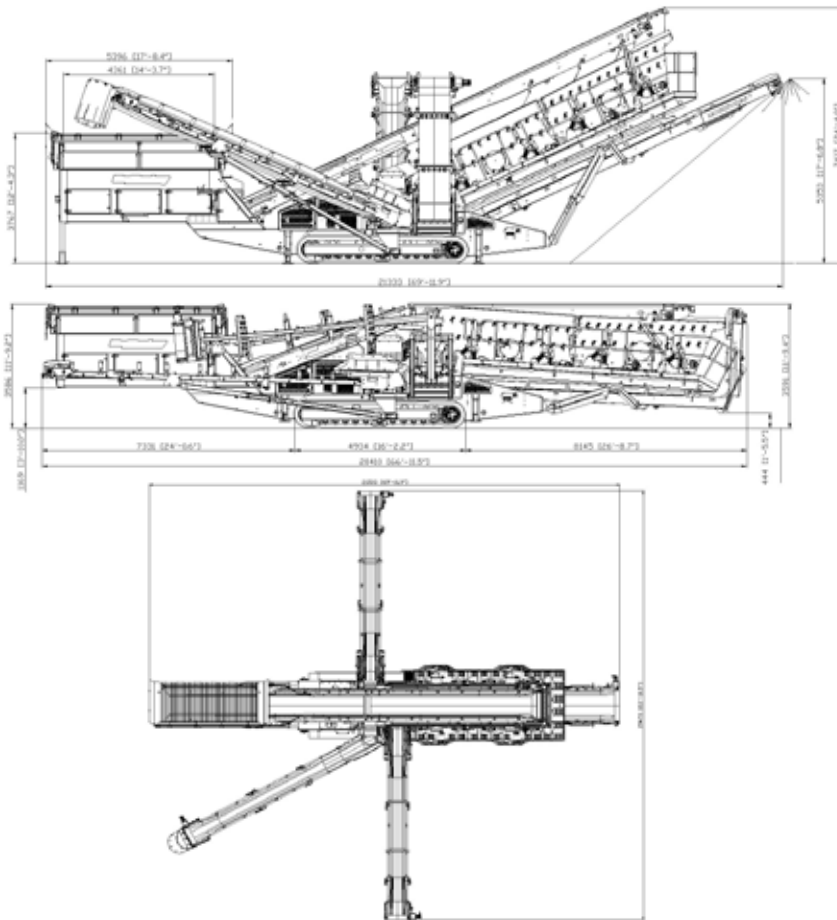

## TECH SPECS

### Stockpile Height

Tail Conveyor	4992mm (16' – 4.5")
Side Conveyors	5398mm (17' – 8.5")
Radial Conveyor	4825mm (15' – 9.8")

### Dual Screenboxes

Top Deck	3660mm x 1830mm (12' x 6')
Middle Deck	3660mm x 1830mm (12 x 6')
Bottom Deck	3050 mm x 1830mm (11' x 6')

### Engines

CAT C7.1 225Hp,  
Volvo D5 218Hp

## TRANSPORT

**Transport Height** 3.6m (11' – 10")

**Transport Length -  
15 ft hopper** 20.41m (64' – 1.5")

**Transport Width -  
800mm aux conveyor** 3.75m (12'2")

**Weight** 42,430 Kgs  
(93,541 lbs)

## OPTIONS

Single or double deck live head |  
Single shaft shredder | 12' or 15' hopper |  
Crusher feed in chute (only in conjunction  
with 15 hopper)