



ST80T-LA STACKER

The McCloskey® ST80T Stacker is all about efficiency, from its speedy setup time to its high degree of mobility, downtime is minimized while throughput and stockpile capacity are maximized. Hydraulic main lift and top fold are standard, as is the diesel power unit. Electric and dual power are also available to get the job done, no matter what application.


FEATURES

- ✓ 900 mm (36") wide heavy duty 80' long conveyor
- ✓ 36.5 kW (49 hp) diesel engine
- ✓ On-site track mobility
- ✓ Large feed hopper
- ✓ Hydraulic folding frame for easy transport
- ✓ Fast on-site setup time (5 minutes)
- ✓ Abundant service room inside the power-pack
- ✓ Lift axle for radial positioning



The 22.5 degree maximum conveyor angle allows for the highest stockpiles per conveyor length in the industry. With its durable truss frame, large feed hopper and base production capacity of 500 TPH with optional upgrades to 800 TPH, the McCloskey ST80T Stacker stands up well above the competition.

We've taken the next big step in its industry leading designs by adding the groundbreaking new All-Terrain Stackers to its line-up. Blending the benefits of onsite track mobility with the high productivity of a radial conveyor, the lift axle option allow the ST80T to switch from track mode to radial in seconds.

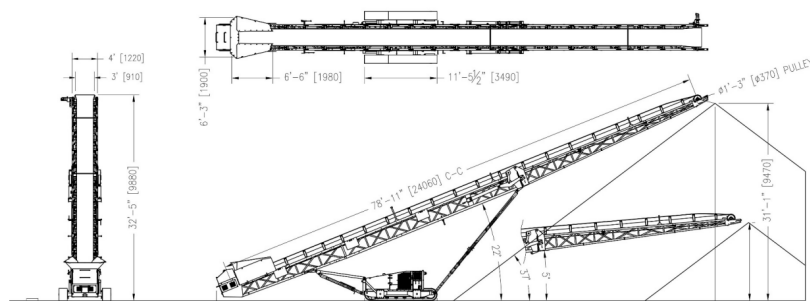

ST80T TECH SPECS

Engine	36.5kW (49Hp)
Belt Length	24.38m (80')
Belt Width	900mm (36")
Stockpile Height	10.0m (32' 10")
Stockpile Capacity	1556m ³ (2035 yd ³)
Production	500 TPH (standard) 800 TPH (optional)

TRANSPORT

Transport Length	15.75m (51' 8")
Transport Height	3.43m (11' 3")
Transport Width	2.85m (9' 4")

OPTIONS

Dual Power | Hopper Extensions | Belt Scale | Anti-Segregation Paddle Wheel | Spray Bar | Auxiliary Guarding | Chevron Belt | Hopper Wing Plates | ASGCO Scraper | Hopper Wear Plate Liner | Impact Idlers | Under Hopper Landing Gear (Standard with Pivot Point on Lift Axle Machines) | Magnet Material Separator | TimBin - Large Hopper Bin (450tph) | Lift Axle