


INTREPID® VIBRATING GRIZZLY FEEDER

Remove Unwanted Fines While Providing a Continuous Feed to Plant


FEATURES

- » Rugged design features like greater I-beam support, precision shafts and Huck fasteners.
- » Unique bottle jack lifting points allow for safer spring maintenance.
- » Adjustable slope and stroke to increase application flexibility and performance.
- » Patent-pending designs manufactured in widths to feed up to 1,400 stph (1,540 mtpH)


APPLICATIONS



Ore/Hard
Rock Mining



Quarried
Stone



River
Gravel



Recycle
Concrete



Fractured
Gravel




Cubical
products



Super Pave
Products

Wheeled 
Stationary 

HIGHLIGHTS

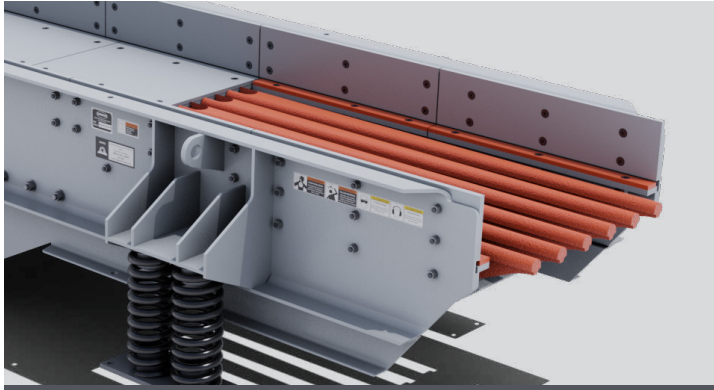


CAST GRIZZLY CARTRIDGES

- » Universal bolt-in bars are for flat or 5° applications, so owners and operators can limit stock to one style.




BOTTLE JACK LIFTING POINTS

- » Designed into the spring section to improve safety during maintenance or repair. No cranes or loaders needed.

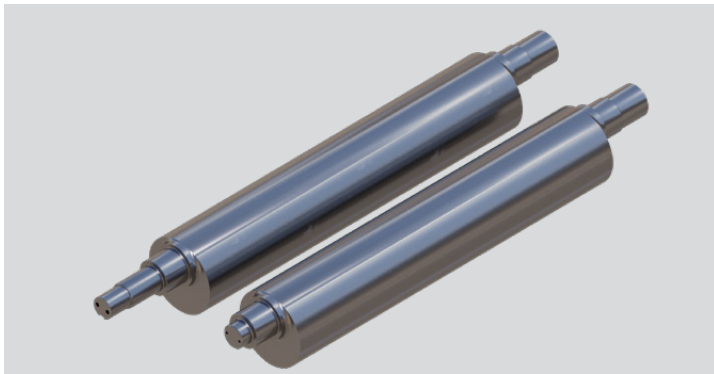

PRECISION MACHINE SHAFTING

- » Provides best-in-class shaft strength and better bearing fit up. Easily access from side of feeder.

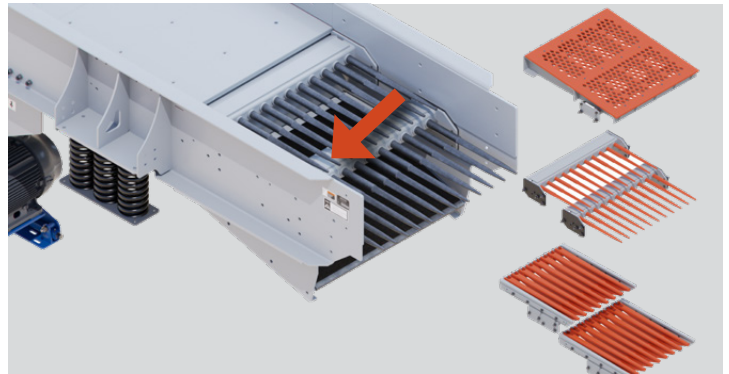

MULTIPLE GRIZZLY SECTION OPTIONS

- » 0 degree or 5 degree Grizzly bars, finger tines and punch plate.

SPECIFICATIONS

INTREPID VGF

Model	Grizzly Decks	Grizzly Length	Size		Weight (Static)		Operating Speed	Required Power		Max Feed Size		Capacity	
			ft	mm x mm	in x ft	kg		lbs	rpm	kw	hp	mm	in
3617VGF	1	5'	920 x 5,180	36" x 17'	4,535	10,000	600-800	15	20	500	20"	200-300	220-330
4012VGF	1	4'	1,040 x 3,660	40" x 12'	3,550	7,826	600-800	15	20	600	24"	320-420	360-470
4016VGF	1	6'	1,040 x 4,875	40" x 16'	4,850	10,692	600-800	18.8	25	600	24"	320-420	360-470
4220VGF	1 or 2	5'	1,067 x 6,090	42" x 20'	5,218	11,500	600-800	18.8	25	600	24"	320-420	360-470
4820VGF	1 or 2	5'	1,219 x 6,090	48" x 20'	6,120	12,765	600-800	22.5	30	700	28"	450-570	500-635
4824VGF	1 or 2	5'	1,219 x 7,320	48" x 24'	9,520	21,000	600-800	30	40	700	28"	450-570	500-635
5420VGF	1 or 2	5'	1,372 x 6,090	54" x 20'	7,725	17,025	600-800	30	40	800	32"	535-685	595-760
5424VGF	1 or 2	5'	1,372 x 7,320	54" x 24'	9,700	21,500	600-800	37.5	50	800	32"	535-685	595-760
6020VGF	1 or 2	5'	1,534 x 6,090	60" x 20'	8,500	18,739	600-800	37.5	50	900	36"	615-765	685-850
6024VGF	1 or 2	5'	1,534 x 7,320	60" x 24'	11,300	23,500	600-800	37.5	50	900	36"	615-765	685-850
6620VGF	1 or 2	5'	1,670 x 6,090	66" x 20'	10,100	22,266	600-800	45	60	1,100	44"	750-900	830-1020
6624VGF	1 or 2	5'	1,670 x 7,320	66" x 24'	11,150	24,581	600-800	45	60	1,100	44"	750-900	830-1020
7220VGF	1 or 2	5'	1,830 x 6,090	72" x 20'	11,750	25,904	600-800	56.3	75	1,300	50"	880-1020	980-1130
7224VGF	1 or 2	5'	1,830 x 7,320	72" x 24'	14,000	30,864	600-800	75	100	1,300	50"	880-1020	980-1130